



POWER SYSTEM

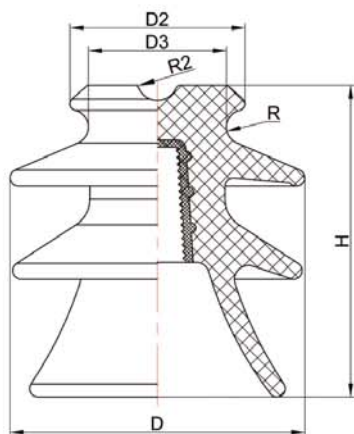

▪ FIG 3.4.1

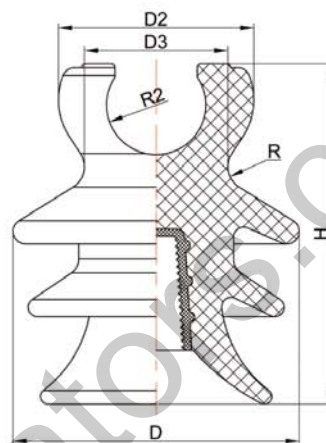

▪ FIG 3.4.2

3.4 Other standard types

Type	Unit	HP2001R	HPSDI30	HPSDI37
Figure No.		3.4.1		3.4.2
Rating Voltage	kV	20	20	20
Creepage distance	mm	400	325	325
Main dimensions	H	185	160	202
	D	175	170	170
	D2	104	102	118
	D3	82	75	85
	R	10	16	14.5
	R2	12	16	59
Cantilever strength	kN	13	13	12.5
Lightning impulse withstand voltage	kV	135	125	125
Power frequency withstand voltage	Dry	85	85	85
	Wet	50	45	45
Power frequency puncture voltage	kV	160	160	130
Net weight	kg	3.7	3.4	3.9
Applicable Standard		IEC 60383		